

# Data Mining for Item Recommendation in MOBA Games

VLADIMIR ARAUJO\*, Pontificia Universidad Católica de Chile

FELIPE RIOS, Pontificia Universidad Católica de Chile

DENIS PARRA\*, Pontificia Universidad Católica de Chile

E-Sports has been positioned as an important activity within MOBA (Multiplayer Online Battle Arena) games in recent years. There is existing research on recommender systems in this topic, but most of it focuses on the character recommendation problem. However, the recommendation of items is also challenging because of its contextual nature, depending on the other characters. We have developed a framework that suggests items for a character based on the match context. The aim of the system is to help players who have recently started the game as well as frequent players to take strategic advantage during a match, and also to improve their purchasing decision making. By analyzing a dataset of ranked game matches through data mining techniques we are able to capture purchase dynamic of experienced players to then use them for recommendation. The results show that our proposed solution yields up to 80% of mAP, suggesting that the method leverages context information successfully. This result, together with open issues we mention in the paper, calls for further research in the area.

CCS Concepts: • **Information systems** → **Recommender systems**; *Data mining*.

Additional Key Words and Phrases: Item Recommendation, Data Mining, MOBA Games

## 1 INTRODUCTION

Competitive video gaming has gained popularity thanks to e-Sports. An analysis by Seo and Jung [17] presented several reasons why people watch e-Sports according to their motivation: from pure entertainment to gaining a better understanding of the game. Recent studies [19] show that an estimated of 335 million spectators watched e-Sports in 2018, generating a revenue of more than \$900M. Although encouraging, the economic impact is not the only reason that makes this phenomena worth of research. Recently, the Olympic Council of Asia decided to include a medal for the e-Sports in their Hangzhou Games in 2022, as the British newspaper *The Guardian*, reported in mid-April of 2017. Certainly, MOBA games have contributed to these initiative.

Several Game AI studies related to MOBA games have been carried out, for instance, intelligent agents [8], prediction of match outcome [12], and also recommender systems [7]. MOBA presents two interesting recommendation problems to researchers: character recommendation, which has been studied in recent years [6, 11] with different approaches, and item recommendation [14], which is still an open issue. This work focuses on the second one.

Recommender systems have been very successful since the Netflix Prize [2]. Classical approaches to multimedia recommendation focus on past user behavior, items similar to those already consumed or similar users to suggest

---

\*Also with Millennium Institute Foundational Research on Data, IMFD.

---

Authors' addresses: Vladimir Araujo, Pontificia Universidad Católica de Chile, Santiago, Chile, vgaraujo@uc.cl; Felipe Rios, Pontificia Universidad Católica de Chile, Santiago, Chile, farios@uc.cl; Denis Parra, Pontificia Universidad Católica de Chile, Santiago, Chile, dparra@ing.puc.cl.

---

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from [permissions@acm.org](mailto:permissions@acm.org).

© 2019 Association for Computing Machinery.

Manuscript submitted to ACM

53 items for only one user [16]. Unlike canonical recommendation problems, in-game recommendation presents further  
54 challenges. First, each MOBA match is unique, presenting a different combination of characters depending on their role  
55 and abilities. Second, when choosing a good team of characters, players must think of the most suitable set of items for  
56 that game considering their allies and enemies. Therefore, context is essential for a relevant recommendation for this  
57 problem.  
58

59 Players use their expertise to acknowledge what item is convenient for a particular situation. Newcomer players  
60 need to do some research on the game dynamics and purchase strategy to understand what they often find with most  
61 popular recommendations by the community. Those recommendations may not be relevant to the context that the  
62 player faces. An adequate recommendation can help not only improve performance on a particular game, but also  
63 smooth the learning curve. On the other hand, professional players are more experienced, but they could take advantage  
64 of recommendations in one-off matches. In other words, a well-trained recommender system can help them to find out  
65 combinations of relevant items for particular cases and contexts.  
66

67  
68 The remainder of this paper is organized as follows: Section 2 shows a brief overview of League of Legends and the  
69 recommendation problem; Section 3 shows the review of the related work; Section 4 explains the methodology; Section  
70 5 presents the results and discussion; and Section 6 synthesizes the main conclusions and future work.  
71

## 72 73 2 LEAGUE OF LEGENDS: OVERVIEW AND RECOMMENDATION PROBLEM

74 League of Legends (LoL) is a very popular game belonging to the MOBA genre. The game consists of two teams (red  
75 and blue) of five players each, that compete to be the first to destroy the enemy base. Each player controls one character  
76 (*champion*) that interacts with the rest through combats, which are carried out in a special arena.  
77

78 Each *champion* has an exclusive set of abilities used to fight and that evolve during the progress of the game. Players  
79 receive gold for capturing positions and killing their opponents or little bots called *minions*. The resources acquired  
80 allow *champions* to extend their abilities by purchasing items. Managing the resources in an appropriate way could  
81 generate an advantage over the rival team.  
82

83 This game presents at least two recommendation problems: *champion* and item recommendation, because there are  
84 more than 140 characters and around 240 items (taking into account basic, advanced and finished items). The second  
85 one is difficult because the items combinations can be of large magnitude if we consider the *champion* role, ally or  
86 enemy team composition. For the scope of this paper, we focus on the finished item recommendation.  
87

88 Figure 1 shows a common example of *matchup*<sup>1</sup>, in which a player has to choose a combination of six finished items  
89 according to the strategy, and it has to be done mainly considering the enemy abilities. To address this problem, we  
90 focus on the recommendation of a set of elements given a *champion* as user and an enemy team as context for the  
91 recommendation.  
92

## 93 94 3 RELATED WORK

95  
96 There are several works related to recommender systems in video games, especially in massive multiplayer online  
97 games, because of the large amount of data that can be gathered and the significant impact that this market has.  
98

99 The consumption of content has been a main motivation for the study of recommendation systems, but maintaining  
100 a similar approach to the general market [7, 10, 20]. On the other hand, in-game recommendations have also received  
101

102  
103 <sup>1</sup>The team composition of the opponents to face off during a match.



Fig. 1. For this case with the current *champion* selection for both teams (red and blue), one *champion* is selected for item recommendation. We concentrated on the enemy team as context to reduce the search space.

interest, where most works focused on collaborative filtering for the recommendation of items for role-playing games [3, 13, 18].

The MOBA Games genre has been studied mostly from the *champion* prediction paradigm. Recent work [11] exploited the use of association rules and ANN (artificial neural networks) to predict the winning team given a character selection. The system was able to give a recommendation of a character based on the choice phase. The ANN then predicts if the actual selection made by the players will be the winner.

Two of the most known MOBA games, LoL and DotA2 have draft pick<sup>2</sup> mode. The work by Chen et al. [6] predicts the most suitable *champion* selection in that mode, taking turns with an open selection (where each participant is aware of the selection of her mates and opponents). Given the current partial state of the *champion* selection, a Monte Carlo Tree Search will predict the most efficient *champion* selection.

Item recommendation is a paradigm that few researchers have explored. To solve this problem, some studies [14] have taken into consideration another sequential solution. Using association rules, the method predicts the next purchase of an item given a state of purchases of a specific *champion*. Some role or style associated with the *champion* has been taken into consideration.

All of these works explore different behavior prediction tasks with a recommender system. It is important to acknowledge that, to the best of our knowledge, there is no literature on item recommendation that takes the context into consideration. All item recommendations that can be found maximize the effectiveness of a single *champion*, without considering related factors of a match, in other words, the context.

<sup>2</sup>Mode where players ban and select *champions* in competitive matches.

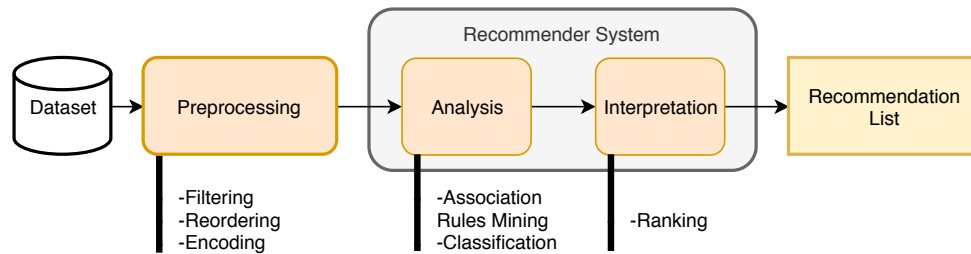


Fig. 2. Recommendation framework based on data mining process.

## 4 METHODOLOGY

We have tested several techniques for item recommendation for LoL. Figure 2 shows the proposed framework, which is based on classical data mining methodology [1], but including slight changes to use it for the recommendation task. This methodology allows generating recommendations using knowledge learned from the actions carried out by the users in previous matches.

The first step is preprocessing the dataset, which consists of filtering, reordering, and encoding. We then apply several techniques of data mining both descriptive (see Section 4.2) and predictive (see Section 4.3). From each technique we produce a ranking interpretation to perform the recommendation.

### 4.1 Dataset and Preprocessing

The dataset used in this study is provided by [4], consisting of 184,070 ranked matches from the regions of Europe and North America. It was selected because we hypothesized that information was collected from high-level players who know how to choose the items based on current context. The raw dataset includes several files that present information about a match, such as the *champions* used, the items purchased, and the resulting statistics. It does not include information about the users' account.

Because the purpose is a recommendation for a specific champion, we decided to reorganize the data including the most relevant information for this work. The final dataset has transactional structure<sup>3</sup>, where each instance includes the identifiers of a selected champion during a match, the items used, and the enemies involved. We filtered only the winning matches of the season 7 because each season involves big changes in the metagame that affect the purchase strategy [9].

On the one hand, all new *champions* released in the game after season 7 were removed, leaving 136. On the other hand, only finished items were used, which means that basic, advanced and consumable items were eliminated, resulting in 93 items. This final file was divided into 631,590 instances for training and 70,405 instances for testing.

### 4.2 Recommender System Based on Association Rules Mining

The association rules have already been used for the recommendation of items for DotA 2 [14], but our approach is slightly different. We filtered the dataset for each champion of the game, including both the enemies confronted and the items used as a transaction, for rules mining. We did this because item purchasing strategies tend to be champion-specific [5] and also so that the item recommendation will be context-aware.

<sup>3</sup>Typically used in data mining, each record captures a transaction, such as a customer's purchase, a flight booking, etc.

This system consists of an association rules algorithm module that extracts and stores the frequent itemset of each champion. We used the Apriori and Eclat algorithms for this task. Also, a search engine module is responsible for generating a recommendation, through the search in the files stored by the previous module.

Through  $X, Y = \phi_{AR}(D \mid supp_{min}, conf_{min})$ , the algorithm generates rules with the form  $X \rightarrow Y$ , where  $Y$  is an enemy *champion* and  $X$  is a subset of items.  $D$  is the transactional data of a picked *champion* composed of the enemy team and the items used.

On the one hand, *support* is defined as the perceptual frequency of observation of the same item in all the transactions. On the other hand, *confidence* is defined as the probability  $P(Y \mid X)$ . For both it is important to set a minimum value *supp<sub>min</sub>* and *conf<sub>min</sub>*. Both Apriori and Eclat were set up with minimum support of 4 and minimum confidence of 80%.

In this way, it is possible to find a frequent itemset  $I_f = X$ . However, because it is quite likely that  $I_f$  could contain a subset of frequent itemset  $J_f$ , we use the maximal itemset that is defined as  $I_m = I_f \mid I_f \not\supset J_f \supset I_f$ . The itemset  $I_m$  retrieved with the highest confidence were used to generate the recommendation.

### 4.3 Recommender System Based on Classifiers

Classifiers have been used frequently for mining tasks [15], for this work we applied a supervised approach for multi-label classification to obtain a mapping between features space (*champions*) and label space (items). On the one hand, the input, which represents a match played, was coded with one-hot, where the selected *champion* was represented with 1, the enemies with -1, and the rest with 0. On the other hand, the output presents the items used with 1 and 0 for the others. Though we evaluated three types of classifiers, the task can be carried out with other models.

**4.3.1 Decision Trees.** This technique generates a classifier in the form of a tree structure based on the features of the inputs. In this work, each decision node evaluates the *champion* selected and the enemies presented, while leaf nodes indicate the item used in that context. We have implemented a decision tree with the Gini impurity function to measure the quality of a split, because it is good at dealing with classification errors and is not computationally exhausting. In addition, we do not use any maximum depth value for the tree to capture special cases of the context.

**4.3.2 Logistic Regression.** Logistic regression is a linear model used to predict the probability that an input belongs to one class or another. Normally, this model is trained with gradient descent, but due to the amount of this dataset, we decided to use stochastic gradient [21]. In addition, to use this model as a multi-label classifier, we adopted the one-vs-all strategy, which consists of fitting one classifier per class. The class is then fitted against all the other classes for each classifier.

**4.3.3 Artificial Neural Network.** Multi-Layered Perceptron (MLP) is frequently used to approximate nonlinear relationships existing between an input and the corresponding output. We used a fully connected architecture with 2 hidden layers of 150 neurons each, the input layer corresponds to the 136 *champions* and the output layer corresponding to the 93 items. Because this is a multi-label classification, we used binary cross-entropy loss function and sigmoid activation function in order to evaluate each class independently.

### 4.4 Interpretation by ranking

In a general view, in order to generate the itemset recommendation for the user, we use a sort function over the output of the recommender systems based on its probabilities  $RecList = sort(Output_{RecSys}, P)$ .

Table 1. Results for @N-itemset.

Method	Precision	Recall	F1-score	MAP	MRR
Apriori@1	0.23	0.11	0.18	0.43	0.43
Eclat@1	0.44	0.12	0.18	0.44	0.44
DTree@1	0.65	0.17	0.27	0.64	0.64
Logit@1	0.67	0.18	0.28	0.67	0.67
ANN@1	<b>0.71</b>	<b>0.19</b>	<b>0.30</b>	<b>0.71</b>	<b>0.71</b>
Apriori@3	0.42	0.33	0.36	0.59	0.60
Eclat@3	0.42	0.33	0.36	0.60	0.61
DTree@3	0.47	0.37	0.41	0.71	0.73
Logit@3	0.53	0.42	0.46	0.74	0.76
ANN@3	<b>0.60</b>	<b>0.48</b>	<b>0.52</b>	<b>0.78</b>	<b>0.79</b>
Apriori@6	0.40	0.62	0.48	0.58	0.63
Eclat@6	0.41	0.62	0.48	0.59	0.64
DTree@6	0.32	0.50	0.38	0.69	0.75
Logit@6	0.37	0.59	0.43	0.71	0.78
ANN@6	<b>0.44</b>	<b>0.69</b>	<b>0.53</b>	<b>0.74</b>	<b>0.81</b>

On the one hand, association rules methods generate several frequent itemsets with a confidence value associated. We organized these itemsets from highest to lowest, then we take the first one. If the highest confidence itemset does not have a high enough amount for generating the recommendation required, the next itemset is merged.

On the other hand, because of the implemented classifiers have a multi-label output, we apply sort function over the list of probabilities. This function returns the most probable item for the context at the beginning and so on.

## 5 RESULTS AND DISCUSSION

In order to measure the quality of our systems, we adopt an evaluation per itemset size using metrics like precision, recall and F1-score.

It must be taken into account that it is possible that a *champion* has not completed its items-build<sup>4</sup> during a match. Knowing that, the first evaluation was done by generating a fixed itemset size recommendation for each instance in the test set.

Table 1 shows the results, and we have also included the mean average precision (MAP), which evaluates relevant items from 1 to k, and the mean reciprocal rank (MRR), which evaluates the rank of the first correct item. Typical

<sup>4</sup>Each champion can only hold six finished items.

313 behavior occurs in all models: precision decays and recall rises while the list of recommendations increases. Therefore,  
314 F1 grows, transmitting the balance between precision and recall.

315 As we expected ANN model outperforms the other approaches [1], achieving F1 of 53%, and MAP of 74%, while the  
316 worst was Apriori approach reaching F1 of 48%, and MAP of 58%, showing a difference of  $\sim 15\%$  between them. In  
317 addition, ANN obtained 71%, 79% and 81% of MRR, which might indicate that this model recommends the first best  
318 situational-item.  
319

320 For the second evaluation, we take into account the dimension of the label vector. We divide the dataset of testing  
321 into six groups, according to the size of the label vector, and each group is evaluated with itemset recommendations of  
322 the corresponding size. Figure 3 shows the results, in this evaluation we also add Random and *champion*-based Most  
323 Popular recommendation because there is not a previous baseline. It is possible to see that the ANN recommender has  
324 the highest performance once again, reaching 80% of MAP@6.  
325  
326

327 In contrast, as we expected, the Random recommendation achieved the lower performance with almost 15% of  
328 MAP@6. Remarkably, Most Popular recommendation achieved only 20% in spite of being a *champion*-based version.  
329 This result may suggest that items used during a match are dependent on the current situation.

330 As seen in the previous evaluation, ANN, Logit and Decision trees outperform Apriori and Eclat algorithms in  
331 almost all itemset sizes. There was an unexpected case with the Eclat algorithm, which could predict the first best  
332 situational-item (best performance of MAP@1). However, we assume that it was a coincidence because it then shows  
333 lowest performance than the rest.  
334

335 These results are promising, however, we only use finished items. The inclusion of the remaining items could reduce  
336 the performance of our models, so more sophisticated systems that take into account more information from the dataset  
337 may be necessary.  
338  
339

## 341 6 CONCLUSIONS AND FUTURE WORK

342 In this paper, we presented a simple framework for the recommendation of items for LoL. It is based on a data mining  
343 methodology using five different methods. The evaluation showed promising results with the best model based on  
344 ANN, which seems to be able to make recommendations according to the context (enemy team).  
345

346 This work shows that the recommendation systems in the MOBA games have relevant challenges to face, encouraging  
347 to explore this field to improve these types of systems. Adding context to the recommendations enhances the predictions  
348 in a important range.  
349

350 There is significant room for improvement. Given that the context is unique to each *matchup* it would be desirable to  
351 have a system that can run during a match. Future work will focus on assert which technique could run in real-time  
352 without losing accuracy.  
353

354 A qualitative evaluation by an expert would be desirable to analyze the list of recommendations in an experimental  
355 setting. This might ensure that the suggested items are reliable and that they actually include context information. We  
356 will also continue with the context approach, but use additional information such as the allied team, characteristics of  
357 the items and the role of the characters.  
358  
359

## 361 7 ACKNOWLEDGEMENTS

362 This work has been partially funded by Millennium Institute for Foundational Research on Data (IMFD).  
363  
364

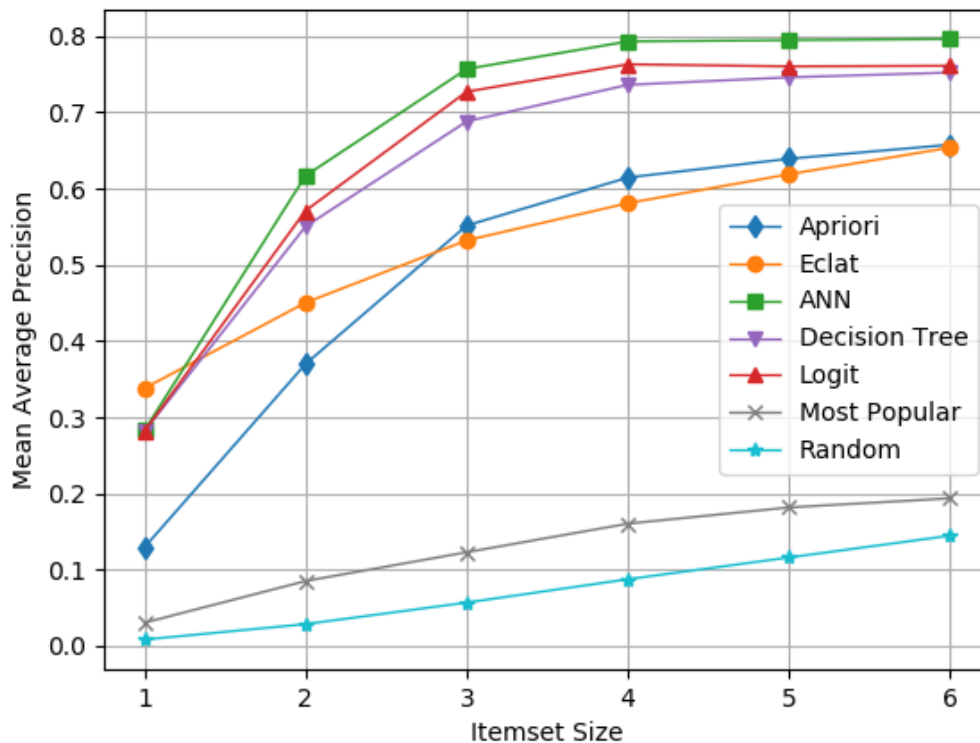


Fig. 3. Evaluation with MAP by itemset size for the second evaluation.

## REFERENCES

- [1] Xavier Amatriain and Josep M. Pujol. 2015. Data Mining Methods for Recommender Systems. In *Recommender Systems Handbook*. Springer US, 227–262. [https://doi.org/10.1007/978-1-4899-7637-6\\_7](https://doi.org/10.1007/978-1-4899-7637-6_7)
- [2] James Bennett, Stan Lanning, et al. 2007. The netflix prize. In *Proceedings of KDD cup and workshop*, Vol. 2007. New York, NY, USA, 35.
- [3] Paul Bertens, Anna Guitart, Pei Pei Chen, and Africa Perianez. 2018. A Machine-Learning Item Recommendation System for Video Games. In *2018 IEEE Conference on Computational Intelligence and Games (CIG)*. IEEE. <https://doi.org/10.1109/cig.2018.8490456>
- [4] Paolo Campanelli. 2017. League of Legends Ranked Matches. data retrieved from Kaggle, <https://www.kaggle.com/paololol/league-of-legends-ranked-matches>.
- [5] O. Cavadenti, V. Codocedo, J. Boulicaut, and M. Kaytoute. 2016. What Did I Do Wrong in My MOBA Game? Mining Patterns Discriminating Deviant Behaviours. In *2016 IEEE International Conference on Data Science and Advanced Analytics (DSAA)*. 662–671. <https://doi.org/10.1109/DSAA.2016.75>
- [6] Zhengxing Chen, Truong-Huy D Nguyen, Yuyu Xu, Christopher Amato, Seth Cooper, Yizhou Sun, and Magy Seif El-Nasr. 2018. The art of drafting: A Team-Oriented Hero Recommendation System for Multiplayer Online Battle Arena Games. In *Proceedings of the 12th ACM Conference on Recommender Systems - RecSys '18*. ACM Press. <https://doi.org/10.1145/3240323.3240345>
- [7] Germán Cheuque, José Guzmán, and Denis Parra. 2019. Recommender Systems for Online Video Game Platforms: The Case of STEAM. In *Companion Proceedings of The 2019 World Wide Web Conference (WWW '19)*. ACM, New York, NY, USA, 763–771. <https://doi.org/10.1145/3308560.3316457>
- [8] V. d. N. Silva and L. Chaimowicz. 2015. On the Development of Intelligent Agents for MOBA Games. In *2015 14th Brazilian Symposium on Computer Games and Digital Entertainment (SBGames)*. 142–151. <https://doi.org/10.1109/SBGames.2015.33>
- [9] Scott Donaldson. 2015. Mechanics and Metagame. *Games and Culture* 12, 5 (jun 2015), 426–444. <https://doi.org/10.1177/1555412015590063>
- [10] Jinyoung Han, Daejin Choi, Taejong Chung, Chen-Nee Chuah, Hyun-chul Kim, and Ted Taekyoung Kwon. 2019. Predicting content consumption from content-to-content relationships. *Journal of Network and Computer Applications* 132 (2019), 1–9.



- 417 [11] Lucas Hanke and Luiz Chaimowicz. 2017. A Recommender System for Hero Line-Ups in MOBA Games. [https://aaai.org/ocs/index.php/AIIDE/](https://aaai.org/ocs/index.php/AIIDE/AIIDE17/paper/view/15902)  
418 AIIDE17/paper/view/15902
- 419 [12] Victoria J. Hodge, Sam Devlin, Nick Sephton, Florian Block, Anders Drachen, and Peter I. Cowling. 2017. Win Prediction in Esports: Mixed-Rank  
420 Match Prediction in Multi-player Online Battle Arena Games. *CoRR* abs/1711.06498 (2017). arXiv:1711.06498 <http://arxiv.org/abs/1711.06498>
- 421 [13] S.G. Li and L. Shi. 2013. The recommender system for virtual items in MMORPGs based on a novel collaborative filtering approach. *International*  
422 *Journal of Systems Science* 45, 10 (jan 2013), 2100–2115. <https://doi.org/10.1080/00207721.2012.762560>
- 423 [14] W. Looi, M. Dhaliwal, R. Alhaji, and J. Rokne. 2018. Recommender System for Items in Dota 2. *IEEE Transactions on Games* (2018), 1–1. <https://doi.org/10.1109/TG.2018.2844121>  
424
- 425 [15] Maryam Khanian Najafabadi, Azlinah Hj. Mohamed, and Mohd Naz'ri Mahrin. 2017. A survey on data mining techniques in recommender systems.  
426 *Soft Computing* 23, 2 (nov 2017), 627–654. <https://doi.org/10.1007/s00500-017-2918-7>
- 427 [16] Denis Parra and Shaghayegh Sahebi. 2012. Recommender Systems: Sources of Knowledge and Evaluation Metrics. In *Advanced Techniques in Web*  
428 *Intelligence-2*. Springer Berlin/Heidelberg, 149–175.
- 429 [17] Yuri Seo and Sang-Uk Jung. 2016. Beyond solitary play in computer games: The social practices of eSports. *Journal of Consumer Culture* 16, 3 (2016),  
430 635–655.
- 431 [18] Rafet Sifa, Eric Pawlakos, Kevin Zhai, Sai Haran, Rohan Jha, Diego Klabjan, and Anders Drachen. 2018. Controlling the crucible. In *Proceedings of*  
432 *the Australasian Computer Science Week Multiconference on - ACSW '18*. ACM Press. <https://doi.org/10.1145/3167918.3167926>
- 433 [19] M Sjöblom, J Hamari, H Jylhä, J Macey, and M Törhönen. 2019. Esports: Final Report. *Tampere University* (2019).
- 434 [20] Z. Tao, M. Cheung, J. She, and R. Lam. 2014. Item Recommendation Using Collaborative Filtering in Mobile Social Games: A Case Study. In *2014*  
435 *IEEE Fourth International Conference on Big Data and Cloud Computing*. 293–297. <https://doi.org/10.1109/BDCloud.2014.73>
- 436 [21] Y. Wang, D. Feng, D. Li, X. Chen, Y. Zhao, and X. Niu. 2016. A mobile recommendation system based on logistic regression and Gradient Boosting  
437 Decision Trees. In *2016 International Joint Conference on Neural Networks (IJCNN)*. 1896–1902. <https://doi.org/10.1109/IJCNN.2016.7727431>  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468